

**SEIKO**

# Time Server

TS-2560 / TS-2220



*Keep Trust.*

## High Accurate Time Synchronization

- Accuracy :  $\pm 1 \mu s$  as referring GNSS
- High quality oscillators inside
  - TS-2560 with OCXO : 10ms/day
  - TS-2220 with TCXO : 100ms/day

## Various Time Source

- GPS, QZSS and GLONASS are now able to be used as time sources
- NTP input supported to work as secondary server (TS-2560 only)

## Improved Performance & Power Redundancy

- Processing capability
  - TS-2560 : 10,000 packets/sec
  - TS-2220 : 4,000 packets/sec
- AC Power Redundant Model (TS-2560 only)

## Easy Operation

- GUI is available for setup, management and administration
- Alert notification of status change by SNMP, Syslog and SMTP

SEIKO SOLUTIONS INC.

# Time Server TS-2560 / TS-2220

## Power Redundant High-End Model

### Time Server TS-2560




## Feature-Rich Standard Time Server

### Time Server TS-2220



## Master Clock System

Ensures that network time is accurate, consistent and secure

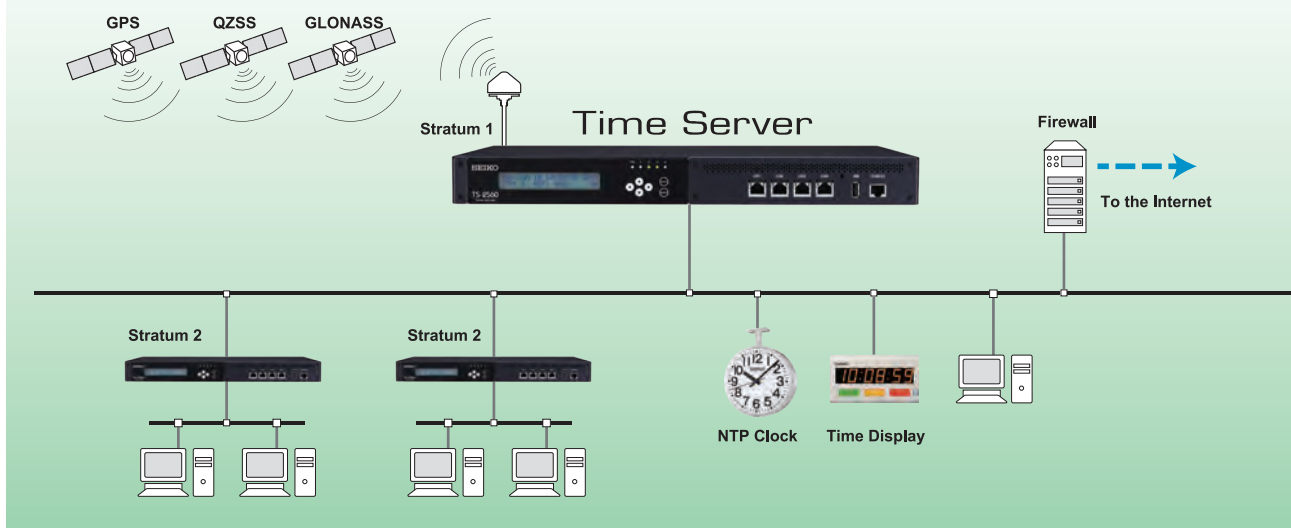

## Time Server Specifications

	TS-2560	TS-2220
Time Source	GPS, QZSS, GLONASS	
Built-in Oscillator Type	OCCO	TCXO
Oscillator Stability	+/- 10ms/day (+25°C)	+/- 100ms/day (+25°C)
Pulse Output	1PPS/10MHz	N/A
Processing Capability	10,000packets/sec	4,000 packets/sec
Ethernet ports	10BASE-T/100BASE-TX/ 1000BASE-T x 4	10BASE-T/100BASE-TX/ 1000BASE-T x1
Leap Second Adjustment	Automatic/Manual	
GPS Rollover Handling*	Yes	
TCP/IP, UDP/IP	Yes	
HTTP, HTTPS	Yes	HTTP:Yes, HTTPS:N/A
IPv6	Yes	
SNMP, syslog	Yes	
SMTP	Yes	N/A
Telnet, SSH	Yes	Telnet:Yes, SSH:N/A
NTPv3/v4, SNTPv3/v4	Yes	
TIME, DAYTIME	Yes	
MD5, Autokey	Yes	

	TS-2560	TS-2220
Power Redundancy	Yes	N/A
Rated Voltage	AC100~240V +/-10%	
Rated Current (Max)	0.32A	0.12A
Power Consumption	18W	6W
Caloric Value	65kJ/h	22kJ/h
Operation Temperature	0~40°C	
Operation Humidity	20~80%RH (no condensation)	
Dimensions	425.5 (W) x 280 (D) x 44 (H) mm (Projections not included)	
Weight	Approx. 3.5 kg	Approx. 3.1 kg



TS-210 (Antenna)  
TS-211 (Holder)

### GNSS Antenna (Bundled)

Operation Temperature	-40°C~85°C
External dimensions	φ66.5×47.5 (H) mm
Weight	Approx. 150g (0.5m cable included)



SCN-300



SLN-576R

### NTP Clock (as optional product)

Displays time delivered from Time Server  
Digital and analog models are available  
See NTP Clock brochure for the whole line up

\*The number of GPS weeks is automatically updated when you start up with its internal hold time or when you synchronize GPS, so Seiko's Time Server TS-2560/2220 can be used safely after the next rollover in 2032.

\*All trademarks and registered trademarks are the property of their respective owners. \*Design and specifications are subject to change without notice.

# SEIKO

SEIKO SOLUTIONS INC.

1-8 Nakase, Mihama-ku, Chiba-shi, Chiba 261-8507, Japan

E-mail : support@seiko-sol.co.jp

http://www.seiko-sol.co.jp/en/